


Universal Power UPS

Line Interactive UPS


VENUS XPE Series 400VA~2000VA

Apperance

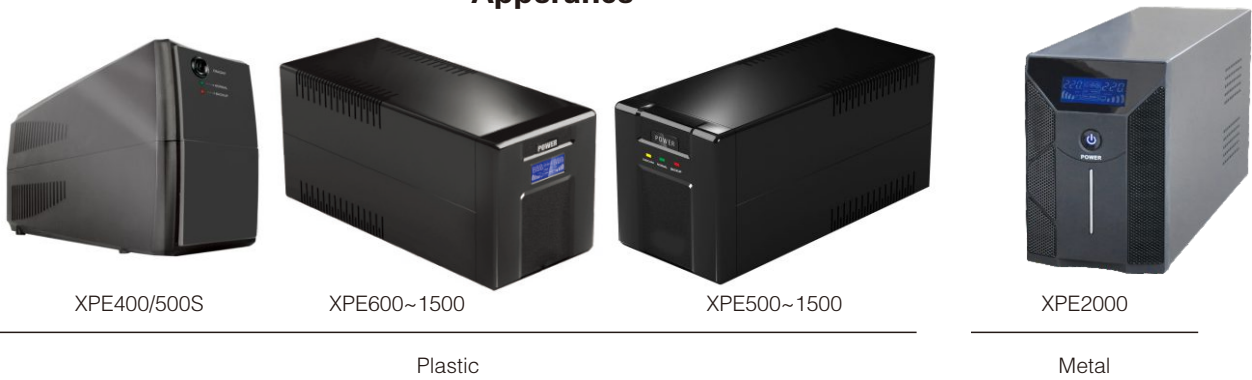


Rear Panel


① Input; ② Input Fuse; ③ Output Socket; ④ RS232/USB; ⑤ RJ45/RJ11 Surge Protection

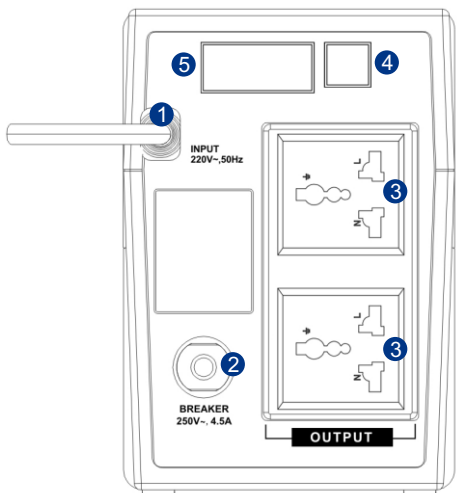

XPE 400/500S/500/600/800

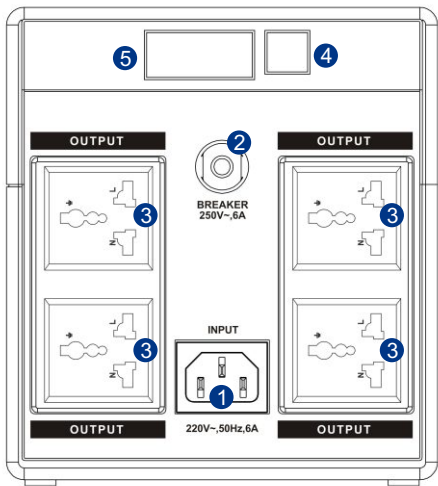

XPE 1000/1200/1500

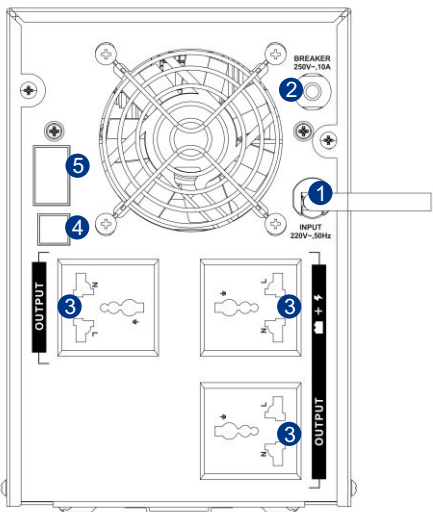

XPE 2000

Features:

- CPU controlled
- Auto-restart function when AC recover
- Cold start
- Auto charging at off mode
- Silence setup
- Wide input voltage range
- Full protection
- Compatible with generator set
- LCD or LED panel for optional
- Smart RS232/USB interface for optional
- RJ45/RJ11 modem/network surge protection for optionnal
- Multiple power outlets

Technical Parameters

Model	XPE 400	XPE 500S	XPE 500	XPE 600	XPE 800	XPE 1000	XPE 1200	XPE 1500	XPE 2000
Capacity	400VA	500VA	500VA	600VA	800VA	1000VA	1200VA	1500VA	2000VA
Input									
Input voltage	220VAC		110/120VAC or 220/230/240VAC						
Input voltage range	170~265VAC		85~150VAC or 145~290VAC						
Input frequency	50Hz		50/60Hz auto sensing						
Output									
Output voltage	220VAC		110/120VAC或220/230/240VAC						
Output voltage range	170~265VAC		102~132VAC或200~255VAC						
Out frequency	Battery mode: 50 ± 0.5Hz		Battery mode: 50 ± 0.5Hz (60 ± 0.5Hz)						
Output Wave form	PWM (Battery mode)								
Transfer time	10ms Maximum		Typical 2~6ms, 10ms Maximum						
Battery									
Voltage	12VDC					24VDC			24VDC
Battery capacity	12V4.5Ah	12V4.5Ah	12V6.5Ah	12V7Ah	12V9Ah	12V7Ah	12V7Ah	12V9Ah	12V7Ah
Battery quantity	1	1	1	1	1	2	2	2	4
Charge time	10~16 hours		4~6 hours recover to 90%						
System									
Cover	Plastic								Metal
Panel	LED			LED/LCD optional					LCD
Protection	Battery low voltage, overload, short circuit protection								
Communication	RS232/USB optional								
Working temperature	0~40℃								
Humidity	20%~90%								
Altitude	≤3500m								
Noise	≤40dB (1m)								
Net Dimension (L*W*H mm)	250*95*140		314*97*143			345*146*162			340*110*265
Net Weight (Kg)	4	4.1	4.2	4.6	5.8	11.0	12.8	14.8	18


Optional output sockets (can be customized on demand)



Optional communication ports (RS232 or USB)



Optional Input plug (can be customized on demand)

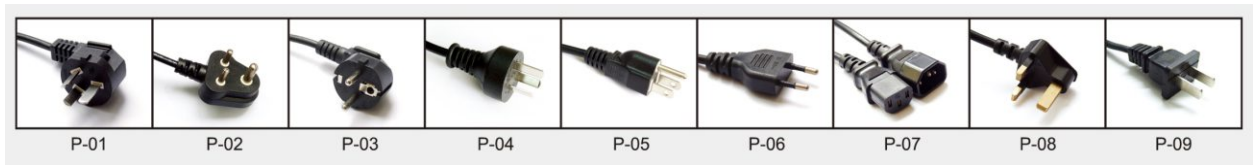

Universal Power System LTD

TEL: (+86)(0)755-2952 6184 Fax: (+86)(0)755-2550 6363
Email: info@universalpowersys.com Web: www.universalpowersys.com

Address: Building No.15, Minzhi 1st Industrial District, Minwang Rd.,
MinzhiCommunity, Longhua New Dist., Shenzhen ,China. P.C: 518131